

5040 - 140% Extension

The 5040 is a 4 beam version of the 5030. The main feature of this slide is the capability to extend up to 140% enabling full access to the rear of the equipment. Carrying loads up to 170 kg per pair. Standard lengths 300 to 1000 mm in 50 mm increments.

All dimensions in mm.


System Load Capacity value refers to a pair of rails at full extension.

Material: Cold-drawn steel profile, zinc plated

Extension: 140%




General Data

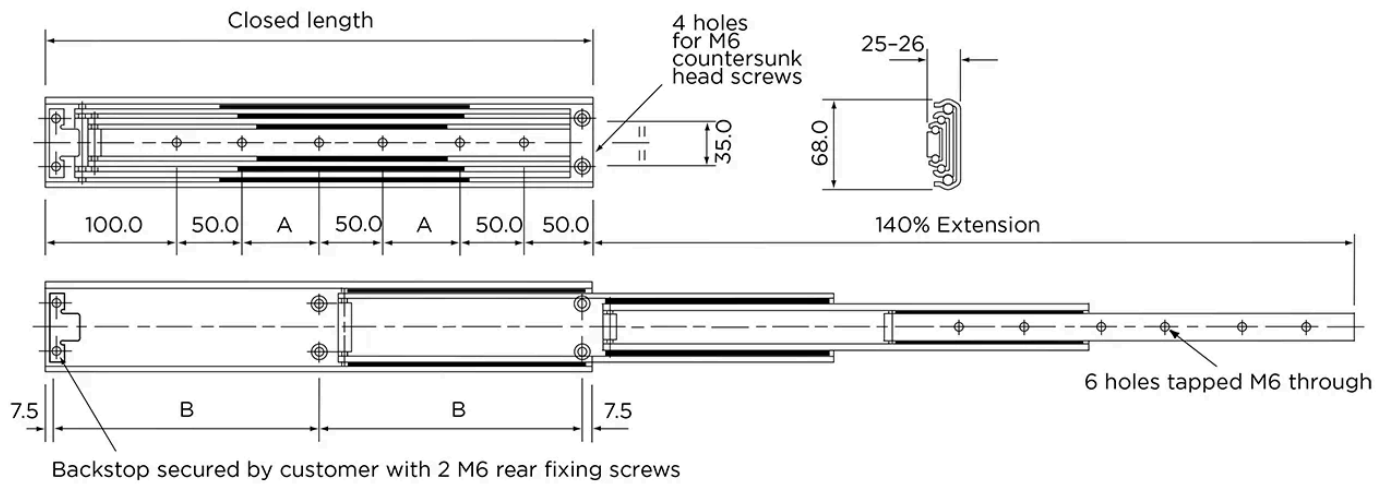

| Designation | Closed Length | Extension Length | System Load Capacity (N) | Number of Fixing Holes | Weight/pc (kg) |
|---------------|---------------|------------------|--------------------------|------------------------|----------------|
| 5040-300-140 | 300 | 420 | 1700 | 4 | 2.12 |
| 5040-350-140 | 350 | 490 | 1700 | 6 | 2.51 |
| 5040-400-140 | 400 | 560 | 1680 | 6 | 2.91 |
| 5040-450-140 | 450 | 630 | 1630 | 6 | 3.32 |
| 5040-500-140 | 500 | 700 | 1600 | 6 | 3.7 |
| 5040-550-140 | 550 | 770 | 1580 | 6 | 4.11 |
| 5040-600-140 | 600 | 840 | 1560 | 6 | 4.49 |
| 5040-650-140 | 650 | 910 | 1400 | 6 | 4.84 |
| 5040-700-140 | 700 | 980 | 1300 | 6 | 5.2 |
| 5040-750-140 | 750 | 1050 | 1200 | 6 | 5.6 |
| 5040-800-140 | 800 | 1120 | 1180 | 6 | 5.98 |
| 5040-850-140 | 850 | 1190 | 1100 | 6 | 6.4 |
| 5040-900-140 | 900 | 1260 | 1000 | 6 | 6.8 |
| 5040-950-140 | 950 | 1330 | 900 | 6 | 7.14 |
| 5040-1000-140 | 1000 | 1400 | 800 | 6 | 7.56 |

Dimensions

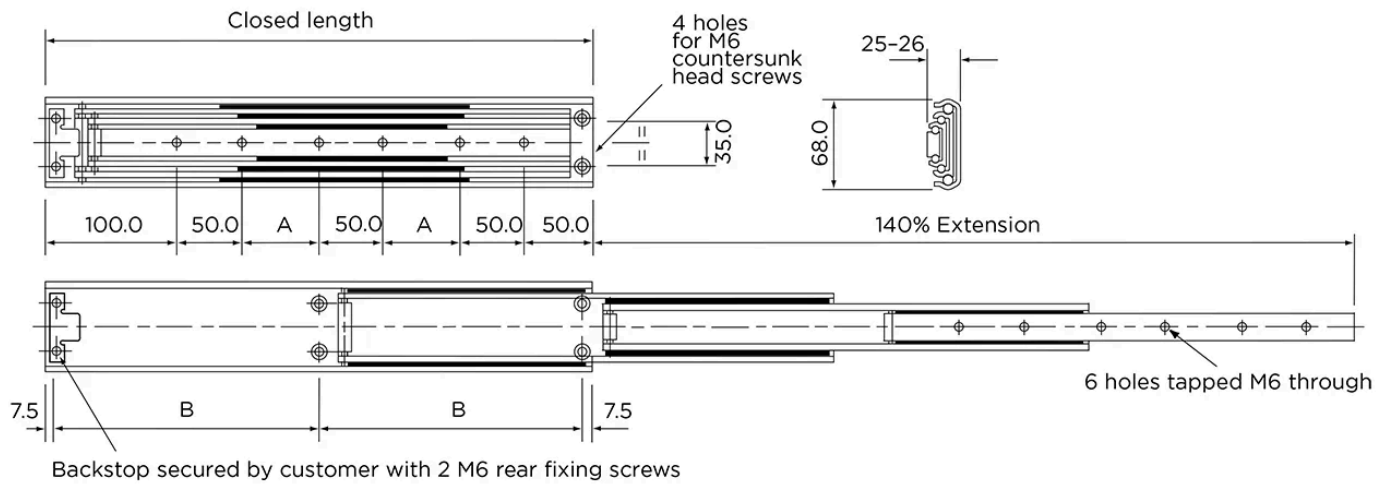

| Designation | A | B |
|---------------|-----|-------|
| 5040-300-140 | - | 142.5 |
| 5040-350-140 | 25 | 167.5 |
| 5040-400-140 | 50 | 192.5 |
| 5040-450-140 | 75 | 217.5 |
| 5040-500-140 | 100 | 242.5 |
| 5040-550-140 | 125 | 267.5 |
| 5040-600-140 | 150 | 292.5 |
| 5040-650-140 | 175 | 317.5 |
| 5040-700-140 | 200 | 342.5 |
| 5040-750-140 | 225 | 367.5 |
| 5040-800-140 | 250 | 392.5 |
| 5040-850-140 | 275 | 417.5 |
| 5040-900-140 | 300 | 442.5 |
| 5040-950-140 | 325 | 467.5 |
| 5040-1000-140 | 350 | 492.5 |