TB40 Double Timing Belt Conveyor


Two synchronised timing belt conveyors in width with end drive. Options such as cleats, false teeth or coated belt. Stand 100% compatible with conveyor available as an option. Inclination or declination of +/- 10° is possible. For dimensions outside our standard range, please contact Rollco.
Note: Please see load/speed diagram for current values. Use our CAD configurator to design your timing belt conveyor according to your preferences and get a visual view, download data sheet and CAD files.




TB40 and TB80 have been extensively tested over its full performance range of speeds, loads, and lengths, together with our standard drive units.
Declaration of incorporation of partly completed machinery according to Directive 2006/42/EC Annex II 1B.
Dimensions in mm.


No. of parallell units: 2
Speed (m/min): Up to 32
Drive side: Left/Right
Incline/decline: +/- 10°
Load capacity (kg): Up to 150
Load capacity/m/unit (kg): 25


Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

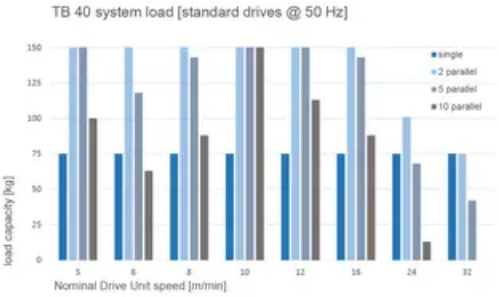


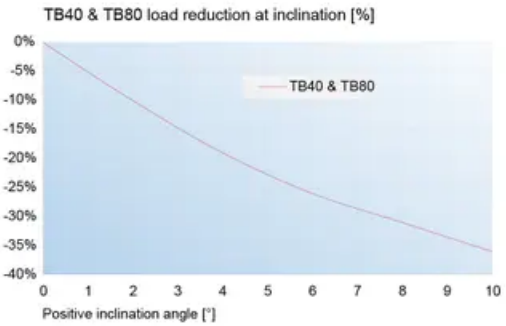

General Data



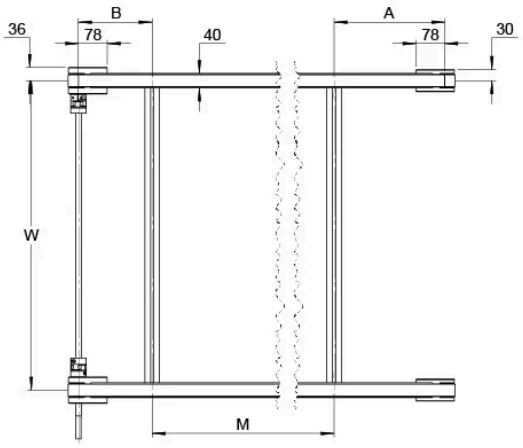



Designation	Profile Width	Profile Height	Belt Width	Total Length (L)	CC (w)
TB40-double	40	40	32	max 6000	max 1500

Designation	No. of parallell units	A	B	M
TB40-double	2	235–390	100–110	160-1000

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.