Conveyor Stand TB40 Double

Aluminium profile stand to match Rollco Timing belt convyeors. Available with adjustable fixable feet. Configure your stand together with the timing belt conveyor in our CAD-configurator.


Values shown under “General data” indicates min and max values in mm according to our standard configurations. For other designs, please contact Rollco.




Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.


General Data

Stand TB40 Double Timing Belt Conveyor

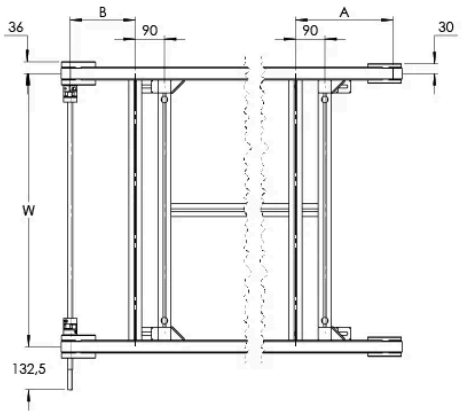


Stand TB40 Double Timing Belt Conveyor
390 ≤ E,D ≤ 650

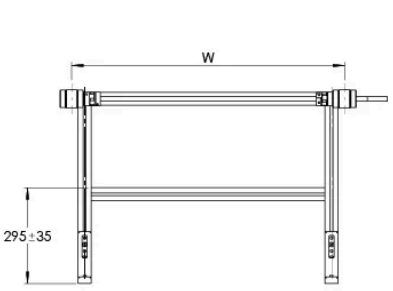

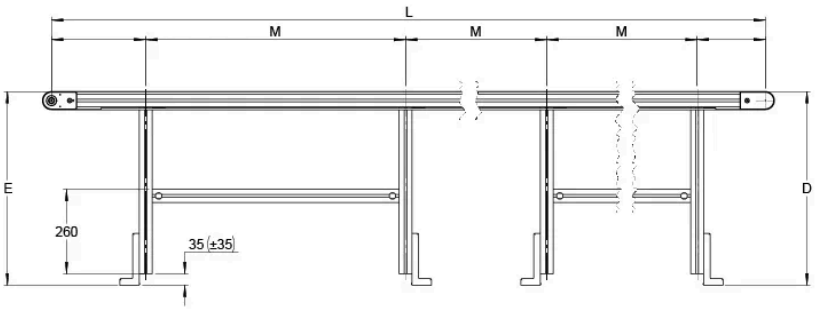


Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

Stand TB40 Double Timing Belt Conveyor
650 < E,D ≤ 900

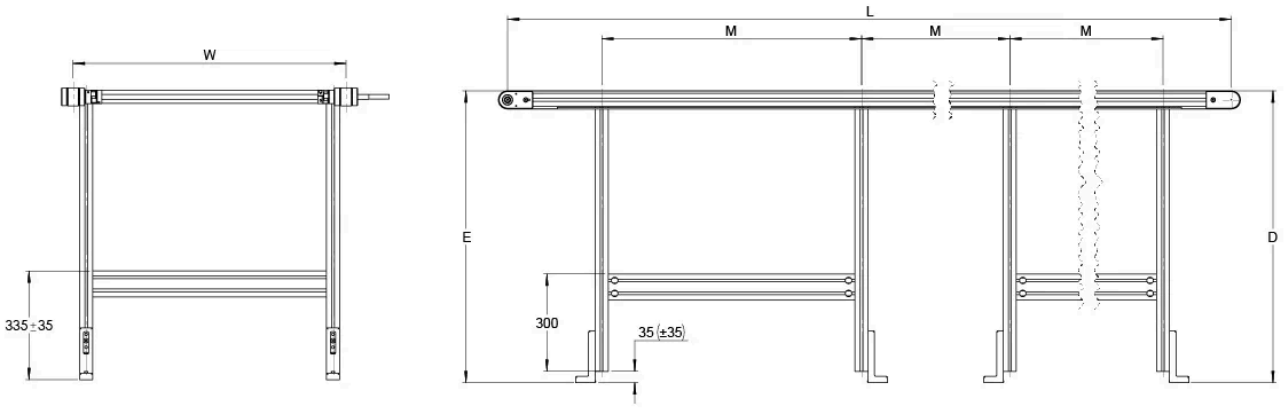

Stand TB40 Double Timing Belt Conveyor
900 < E,D ≤ 1200

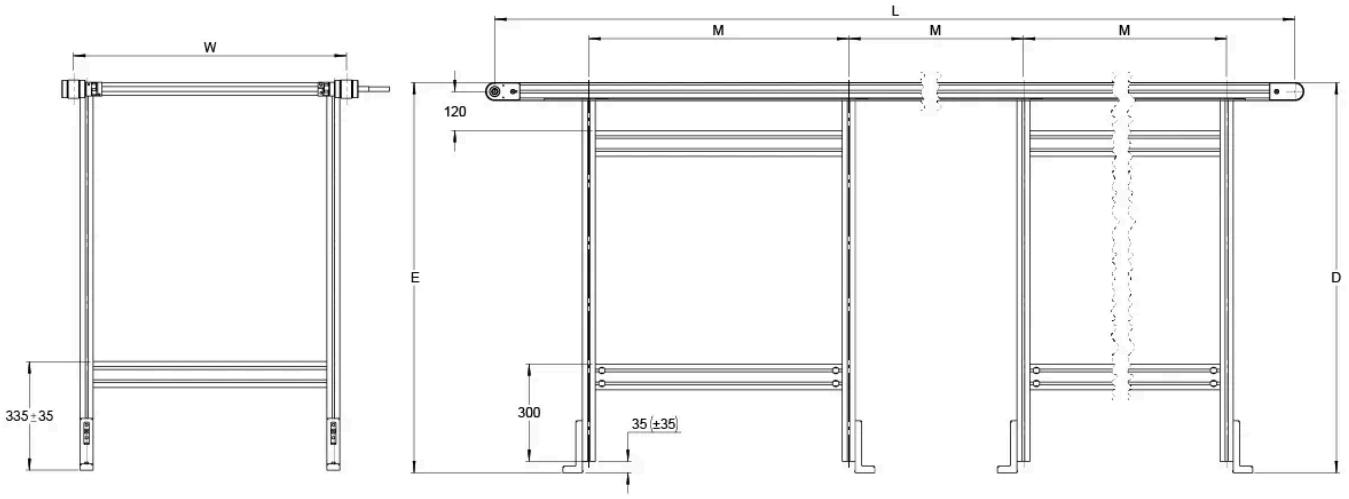

Designation	Profile Width	Profile Height	Total Length (L)	Total Width (W)	CC (w)
TB40-double-stand	40	40	max 6000	max 1500	max 1500

Designation	No. of parallell units	A	B	D	E	M
TB40-double-stand	2	235–390	100–110	390- 1200	390- 1200	160-1000

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.