Knuckle Foot D40


Swiveling and leveling knuckle feet for stable placement on uneven floors. Consists of threaded rod and base of plastic (PA) with anti-slip plate, without bolt-down holes.


Material: Base in plastic PA, threaded rod in steel.
Max. Load (kg): 350
System: 40 - Slot 8; 30 - Slot 8; 30 - Slot 6; 20 - Slot 5
Type: Feet



Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.

General Data

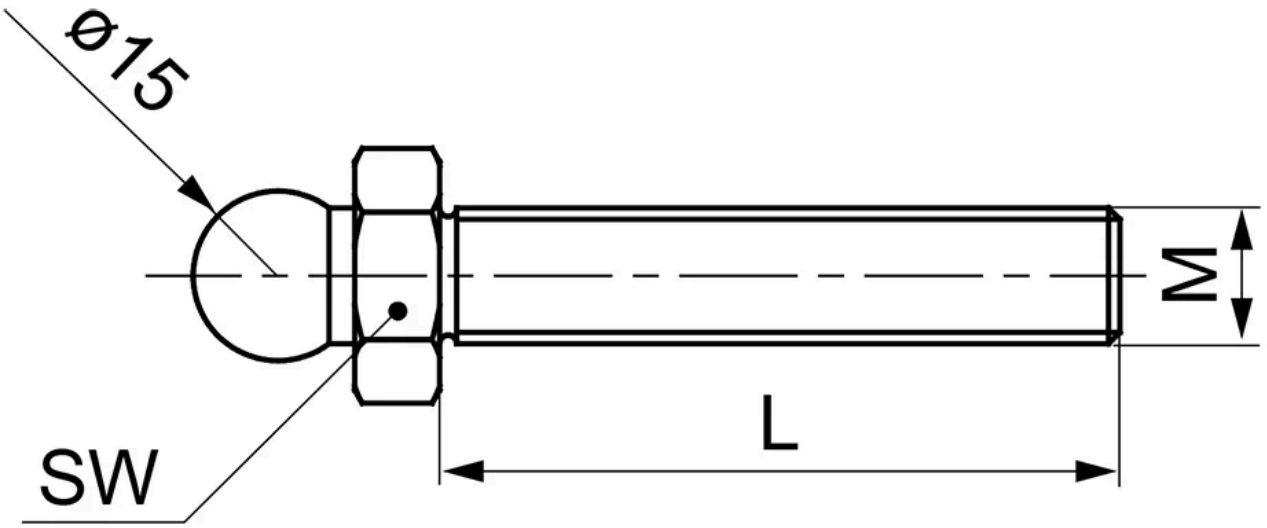

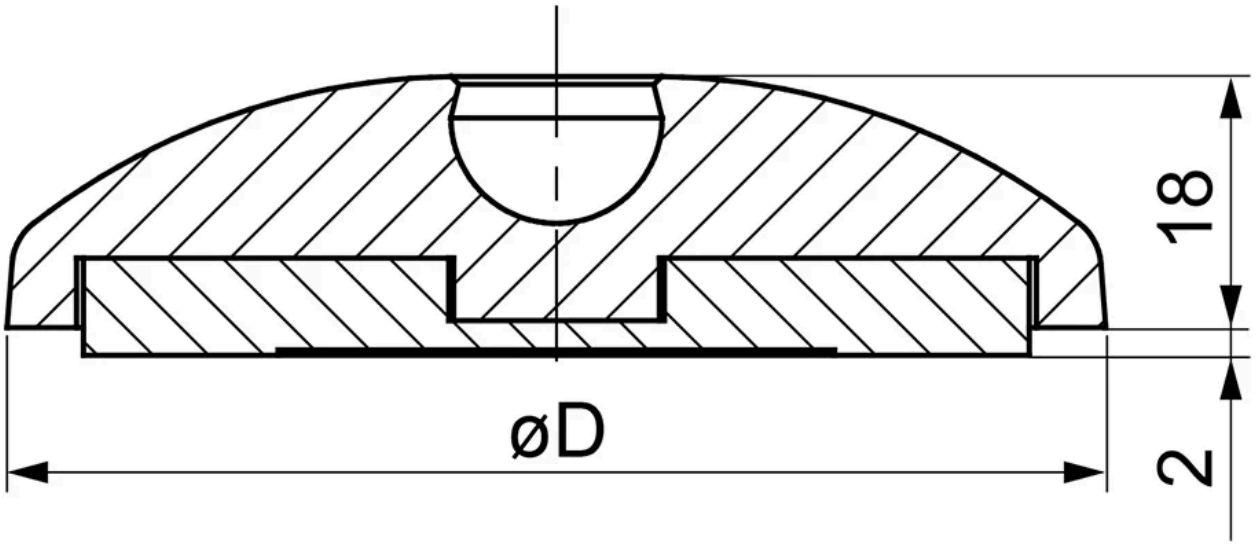

Designation	Description	D	L	M	Weight (g)
RA1366	Threaded rod M8 x 40 and base 40	39	40	M8	53
RA1367	Threaded rod M8 x 80 and base 40	39	80	M8	66

Designation	Max. Load (kg)	SW (mm)
RA1366	350	14
RA1367	350	14

Every care has been taken to ensure the accuracy of the information in this document, but we take no liability for any errors or omissions. We reserve the right to make changes without prior notice.