

## XTR---.0200

- Up to 60% higher load capacity
- Extra sustainable
- Extra exact
- Extra strong
- Extra long-lasting

Use profile XUP---.0700

Fixing square element BQ---.1000

Rectangular fixing element BR---.1100

Note! System Load Capacity refers to capacity of both rail and bearing. Dynamic Load Capacity refers to bearing.

Dimensions in mm.


**Roller Type:** Heavy

**Sizes Available:** 60; 70; 80; 90; 110; 120; 150




## General Data

FA = System Load Capacity Axial  
 FR = System Load Capacity Radial  
 Ca = Dynamic Load Capacity Axial  
 C = Dynamic Load Capacity Radial

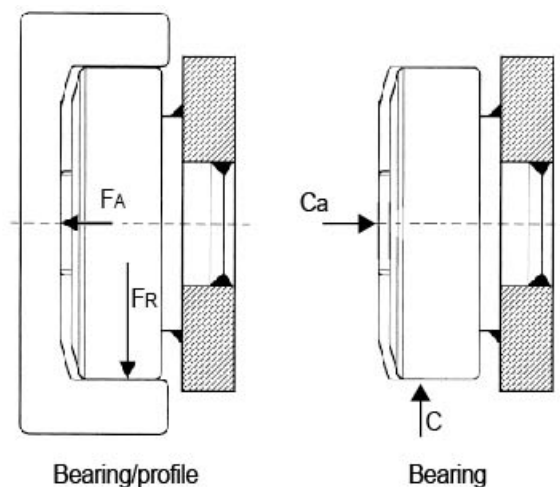

| Designation        | System Load Capacity Radial (N) | System Load Capacity Axial (N) | Dynamic Load Capacity Axial (N) | Dynamic Load Capacity Radial (N) | Profile     |
|--------------------|---------------------------------|--------------------------------|---------------------------------|----------------------------------|-------------|
| <b>XTR060.0200</b> | 15390                           | 3800                           | 11000                           | 31000                            | XUP---.0700 |
| <b>XTR070.0200</b> | 16430                           | 4100                           | 13000                           | 45500                            | XUP---.0700 |
| <b>XTR080.0200</b> | 18210                           | 6500                           | 18000                           | 48000                            | XUP---.0700 |
| <b>XTR090.0200</b> | 31680                           | 6600                           | 23000                           | 68000                            | XUP---.0700 |
| <b>XTR110.0200</b> | 34850                           | 11500                          | 31000                           | 81000                            | XUP---.0700 |
| <b>XTR120.0200</b> | 47430                           | 12700                          | 43000                           | 110000                           | XUP---.0700 |
| <b>XTR150.0200</b> | 82190                           | 22600                          | 68000                           | 151000                           | XUP---.0700 |

## Dimensions

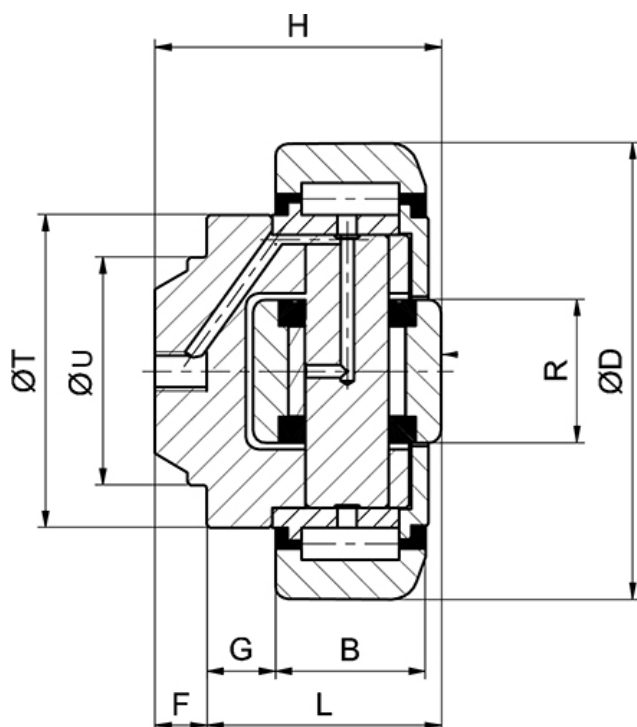

| Designation        | B  | D     | F    | G    | H    | L    | R  | T   | U  |
|--------------------|----|-------|------|------|------|------|----|-----|----|
| <b>XTR060.0200</b> | 20 | 65.5  | 7    | 9    | 37.5 | 30.5 | 20 | 42  | 30 |
| <b>XTR070.0200</b> | 23 | 73.8  | 8    | 10.5 | 44   | 36   | 22 | 48  | 35 |
| <b>XTR080.0200</b> | 23 | 81.7  | 11.5 | 10.5 | 48   | 36.5 | 24 | 54  | 40 |
| <b>XTR090.0200</b> | 30 | 92.4  | 13   | 10.5 | 57   | 44   | 26 | 59  | 45 |
| <b>XTR110.0200</b> | 31 | 111.4 | 14   | 20   | 69   | 55   | 34 | 71  | 60 |
| <b>XTR120.0200</b> | 37 | 126.8 | 16.3 | 14   | 72.3 | 56   | 40 | 80  | 60 |
| <b>XTR150.0200</b> | 45 | 153.1 | 20   | 8.5  | 78.5 | 58.5 | 50 | 103 | 60 |