


T-Nuts, ball-type, push-in

Application:

T-nut for swiveling into the t-slot. Fits into the t-slot at any point. Held in position by a spring-loaded ball. Raised area fits into the t-slot to stop twisting.

System: 40 - Slot 8

Type: T-nuts

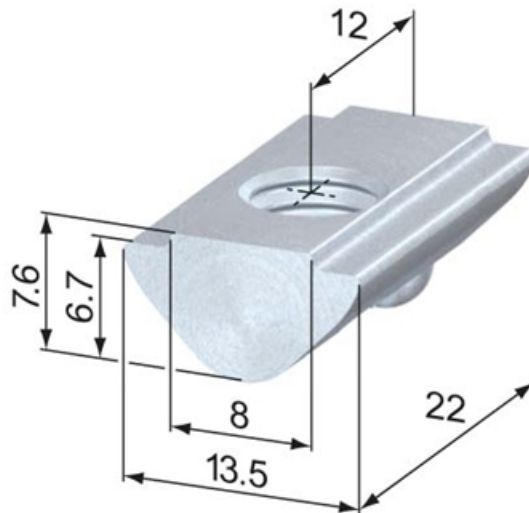

T-Nuts, slide-in



T-Nuts, push-in



T-Slot Strength

Information in regards to the maximum allowable t-slot load capability F. These values already include a safety factor ($S > 2$) against plastic deformation.

| Profile type | Max. pull charge F |
|--------------|--------------------|
| standard | 5000 N |
| double br. | 3250 N |
| semi | 2500 N |
| light | 2000 N |
| superlight | 1750 N |



General Data

| Designation | System | Material | Thread | Weight (g) |
|-------------|-------------|--------------------|--------|------------|
| SV2110V | 40 - Slot 8 | Steel, zinc-plated | M3 | 12 |
| SV2112V | 40 - Slot 8 | Steel, zinc-plated | M4 | 11 |
| SV2114V | 40 - Slot 8 | Stainless steel | M4 | 11 |
| SV2100V | 40 - Slot 8 | Steel, zinc-plated | M5 | 11 |
| SV2104V | 40 - Slot 8 | Stainless steel | M5 | 11 |
| SV2101V | 40 - Slot 8 | Steel, zinc-plated | M6 | 10 |
| SV2105V | 40 - Slot 8 | Stainless steel | M6 | 10 |
| SV2102V | 40 - Slot 8 | Steel, zinc-plated | M8 | 9 |
| SV2106V | 40 - Slot 8 | Stainless steel | M8 | 9 |