


SN Version 1 with 1 slider

SN - 35 - 290 - 430 - 770 - K1 - NIC

Product type	SN	35	290	430	770	K1	NIC
Size							
Slider length							
Stroke							
Rail length							
Clearance and preload (if deviating from standard)							
Expanded surface protection							

Ordering example 1: SN35-290-430-770

Ordering example 2: SN35-290-430-770-K1-NIC

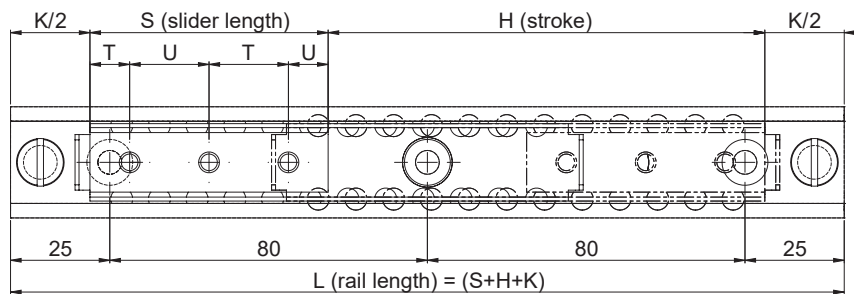

Note: To ensure that all fixing holes of the rail are accessible, S must be $< L/2 - K$. To ensure proper smooth movement it is necessary that $H \leq 7S$

SN Version 2 with Multiple Independent Sliders


	SN - 43 - 2 - 290 - 350 - 1330 - G1 - NIC
Product type	
Size	
Number of sliders	
Slider length	
Stroke of the individual sliders	
Rail length	
Clearance and preload (if deviating from standard)	
Expanded surface protection	

Ordering example 1: SN43-2x290-350-1330

Ordering example 2: SN43-2x290-350-1330-G1-NIC

If the individual slider lengths and/or strokes are different, please order according to ordering example 3.

Ordering example 3: SN28-1x200-300/1x250-415-1240

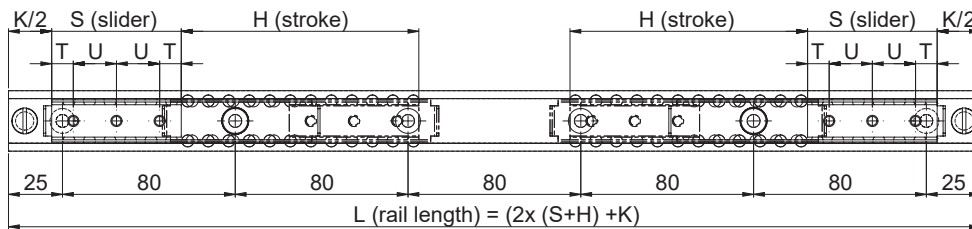

Version 2 is a variant of version 1 with several independent sliders. The total load capacity is based on the number of sliders in the rail and on their lengths.

For systems of versions 2 in size 63 with two independent sliders, the K dimension changes from 80 mm to 110 mm and for each additional slider by another 30 mm.

Note: To ensure that all fixing holes of the rail are accessible, S must be $< L/2 - K$. To ensure proper smooth movement it is necessary that $H \leq 7S$


SN Version 3 with Multiple Synchronized Sliders

SN - 63 - 850 - (370+290) - 400 - 1330 - K1 - NIC

Product type	SN	63	850	(370+290)	400	1330	K1	NIC
Size								
Apparent length, S' of the slider								
Individual length of slider								
Stroke								
Rail length								
Clearance and preload (if deviating from standard)								
Expanded surface protection								

Ordering example 1: SN63-850(370+290)-400-1330

Ordering example 2: SN63-850(370+290)-400-1330-K1-NIC

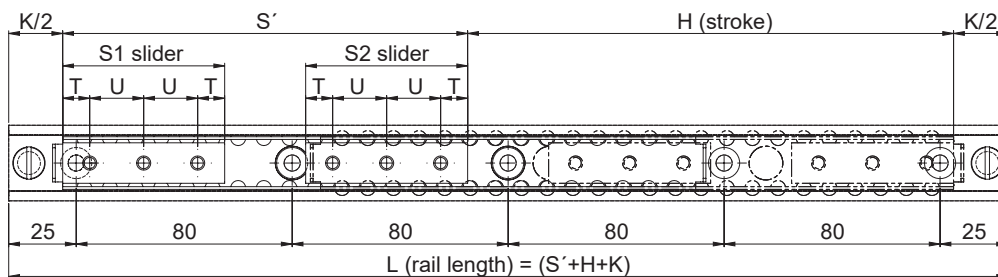

Version 3 is a variant of version 1 with several synchronized sliders. The total load capacity is based on the number of sliders in the rail. The length of the individual sliders can therefore vary.

Note: To ensure that all fixing holes of the rail are accessible, S must be $< L/2 - K$. To ensure proper smooth movement it is necessary that $H \leq 7S$